



( ) Preliminary Specifications  
(V) Final Specifications

|            |                       |
|------------|-----------------------|
| Module     | 15 Inch Color TFT-LCD |
| Model Name | G150XG03 V3           |

**Customer****Date****Checked &  
Approved by**

---

Note: This Specification is subject to change  
without notice.

**Approved by****Date**

---

Vito Huang

---

2010/01/26**Prepared by**

---

Danny Wang

---

2010/01/26

General Display Business Division /  
AU Optonics corporation

## Contents

|                                                           |           |
|-----------------------------------------------------------|-----------|
| <b>1. Operating Precautions</b>                           | <b>4</b>  |
| <b>2. General Description</b>                             | <b>5</b>  |
| 2.1 Display Characteristics                               | 5         |
| 2.2 Optical Characteristics                               | 6         |
| <b>3. Functional Block Diagram</b>                        | <b>9</b>  |
| <b>4. Absolute Maximum Ratings</b>                        | <b>10</b> |
| 4.1 Absolute Ratings of TFT LCD Module                    | 10        |
| 4.2 Absolute Ratings of Environment                       | 10        |
| <b>5. Electrical Characteristics</b>                      | <b>11</b> |
| 5.1 TFT LCD Module                                        | 11        |
| 5.2 Backlight Unit                                        | 13        |
| <b>6. Signal Characteristic</b>                           | <b>15</b> |
| 6.1 Pixel Format Image                                    | 15        |
| 6.2 Signal Description                                    | 16        |
| 6.3 The Input Data Format                                 | 17        |
| 6.4 Interface Timing                                      | 18        |
| 6.5 Power ON/OFF Sequence                                 | 19        |
| <b>7. Connector &amp; Pin Assignment</b>                  | <b>20</b> |
| 7.1 TFT LCD Module: LVDS Connector                        | 20        |
| 7.2 Backlight Unit: Lamp Connector                        | 22        |
| 7.3 Lamp Connector Pin Assignment                         | 22        |
| <b>8. Reliability Test Criteria</b>                       | <b>23</b> |
| <b>9. Mechanical Characteristics</b>                      | <b>24</b> |
| 9.1 LCM Front View and Rear View                          | 24        |
| 9.2 LCM Outline Dimension (Front View)                    | 26        |
| 9.3 LCM Outline Dimension (Rear View)                     | 27        |
| <b>10. Label and Packaging</b>                            | <b>30</b> |
| 10.1 Shipping Label (on the rear side of TFT-LCD display) | 30        |
| 10.2 Carton Package                                       | 30        |
| <b>11 Safety</b>                                          | <b>31</b> |
| 11.1 Sharp Edge Requirements                              | 31        |
| 11.2 Materials                                            | 31        |
| 11.3 Capacitors                                           | 31        |
| 11.4 National Test Lab Requirement                        | 31        |

**Record of Revision**

| <b>Version and Date</b> | <b>Page</b> | <b>Old description</b> | <b>New Description</b> |
|-------------------------|-------------|------------------------|------------------------|
| 0.0 2009/07/06          | All         | First Edition          |                        |
| 0.0 2010/01/26          | All         | Final Spec             |                        |

## 1. Operating Precautions

- 1) Since front polarizer is easily damaged, please be cautious and not to scratch it.
- 2) Be sure to turn off power supply when inserting or disconnecting from input connector.
- 3) Wipe off water drop immediately. Long contact with water may cause discoloration or spots.
- 4) When the panel surface is soiled, wipe it with absorbent cotton or soft cloth.
- 5) Since the panel is made of glass, it may be broken or cracked if dropped or bumped on hard surface.
- 6) Since CMOS LSI is used in this module, take care of static electricity and insure human earth when handling.
- 7) Do not open nor modify the module assembly.
- 8) Do not press the reflector sheet at the back of the module to any direction.
- 9) In case if a module has to be put back into the packing container slot after it was taken out from the container, do not press the center of the CCFL Reflector edge. Instead, press at the far ends of the CFL Reflector edge softly. Otherwise the TFT Module may be damaged.
- 10) At the insertion or removal of the Signal Interface Connector, be sure not to rotate nor tilt the Interface Connector of the TFT Module.
- 11) After installation of the TFT Module into an enclosure (Notebook PC Bezel, for example), do not twist nor bend the TFT Module even momentary. At designing the enclosure, it should be taken into consideration that no bending/twisting forces are applied to the TFT Module from outside. Otherwise the TFT Module may be damaged.
- 12) Cold cathode fluorescent lamp in LCD contains a small amount of mercury. Please follow local ordinances or regulations for disposal.
- 13) Small amount of materials having no flammability grade is used in the LCD module. The LCD module should be supplied by power complied with requirements of Limited Power Source (IEC60950 or UL1950), or be applied exemption.
- 14) The LCD module is designed so that the CFL in it is supplied by Limited Current Circuit (IEC60950 or UL1950). Do not connect the CFL in Hazardous Voltage Circuit.
- 15) Severe temperature condition may result in different luminance, response time and lamp ignition voltage.
- 16) Continuous operating TFT-LCD display under low temperature environment may accelerate lamp exhaustion and reduce luminance dramatically.
- 17) The data on this specification sheet is applicable when LCD module is placed in landscape position.
- 18) Continuous displaying fixed pattern may induce image sticking. It's recommended to use screen saver or shuffle content periodically if fixed pattern is displayed on the screen.

## 2. General Description

G150XG03 V3 is a Color Active Matrix Liquid Crystal Display composed of a TFT-LCD display, a driver circuit, and a backlight system. The screen format is intended to support XGA (1024(H) x 768(V)) screen and 16.2M (RGB 8-bits) colours. All input signals are LVDS interface compatible. Inverter card of backlight is not included. All design rules of this module can correspond to PSWG standard.

### 2.1 Display Characteristics

The following items are characteristics summary on the table under 25 °C condition:

| Items                                                     | Unit         | Specifications                                               |
|-----------------------------------------------------------|--------------|--------------------------------------------------------------|
| Screen Diagonal                                           | [inch]       | 15                                                           |
| Active Area                                               | [mm]         | 304.128(H) x 228.096(V)                                      |
| Pixels H x V                                              |              | 1024x3(RGB) x 768                                            |
| Pixel Pitch                                               | [mm]         | 0.297 x 0.297                                                |
| Pixel Arrangement                                         |              | R.G.B. Vertical Stripe                                       |
| Display Mode                                              |              | TN, Normally White                                           |
| Nominal Input Voltage VDD                                 | [Volt]       | 3.3 typ.                                                     |
| Typical Power Consumption                                 | [Watt]       | 12.82 ( 64 Gray Bar Pattern , exclude inverter)              |
| Weight                                                    | [Grams]      | 1100g (max.)                                                 |
| Physical Size                                             | [mm]         | 326.5(H)x 253.5(V) x 12.0(D) (max.)                          |
| Electrical Interface                                      |              | 1 channel LVDS                                               |
| Surface Treatment                                         |              | Anti-glare, Hardness 3H                                      |
| Support Color                                             |              | 16.2M / 262K colors                                          |
| Temperature Range<br>Operating<br>Storage (Non-Operating) | [°C]<br>[°C] | 0 to +65 (+65 °C as panel surface temperature)<br>-20 to +65 |
| RoHS Compliance                                           |              | RoHS Compliance                                              |

## 2.2 Optical Characteristics

The optical characteristics are measured under stable conditions at 25°C (Room Temperature):

| Item                                              | Unit                 | Conditions                           | Min.  | Typ.  | Max.  | Note    |
|---------------------------------------------------|----------------------|--------------------------------------|-------|-------|-------|---------|
| White Luminance                                   | [cd/m <sup>2</sup> ] | IRCFL= 8mA<br>(center point)         | 200   | 250   | -     | 1       |
| Uniformity                                        | %                    | 9 Points                             | 75    | 80    | -     | 1, 2, 3 |
| Contrast Ratio                                    |                      |                                      | 400   | 700   | -     | 4       |
| Cross talk                                        | %                    |                                      | -     | 1.2   | 1.5   | 5       |
| Response Time                                     | [msec]               | Rising                               | -     | 5.7   |       | 6       |
|                                                   | [msec]               | Falling                              | -     | 2.3   |       |         |
|                                                   | [msec]               | Raising + Falling                    | -     | 8     |       |         |
| Viewing Angle                                     | [degree]             | Horizontal (Right)<br>CR = 10 (Left) | 75    | 85    | -     | 7       |
|                                                   | [degree]             |                                      | 75    | 85    | -     |         |
|                                                   | [degree]             | Vertical (Upper)<br>CR = 10 (Lower)  | 70    | 80    | -     |         |
|                                                   | [degree]             |                                      | 70    | 80    | -     |         |
| Color / Chromaticity<br>Coordinates<br>(CIE 1931) |                      | Red x                                | 0.583 | 0.613 | 0.643 |         |
|                                                   |                      | Red y                                | 0.307 | 0.337 | 0.367 |         |
|                                                   |                      | Green x                              | 0.262 | 0.292 | 0.322 |         |
|                                                   |                      | Green y                              | 0.550 | 0.580 | 0.610 |         |
|                                                   |                      | Blue x                               | 0.115 | 0.145 | 0.175 |         |
|                                                   |                      | Blue y                               | 0.040 | 0.070 | 0.100 |         |
|                                                   |                      | White x                              | 0.283 | 0.313 | 0.343 |         |
|                                                   |                      | White y                              | 0.299 | 0.329 | 0.359 |         |
| Color Gamut                                       | %                    |                                      |       | 60    | -     |         |


Note 1: Measurement method

Equipment Pattern Generator, Power Supply, Digital Voltmeter, Luminance meter (SR\_3 or equivalent)


Aperture 1" with 50cm viewing distance

Test Point Center

Environment < 1 lux

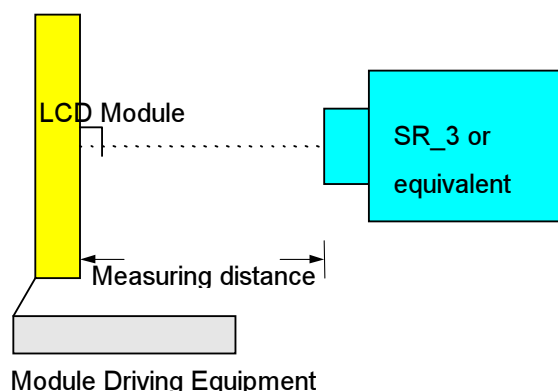

Note 2: Definition of 9 points position (Display active area : 304.128(H) x 228.096(V))

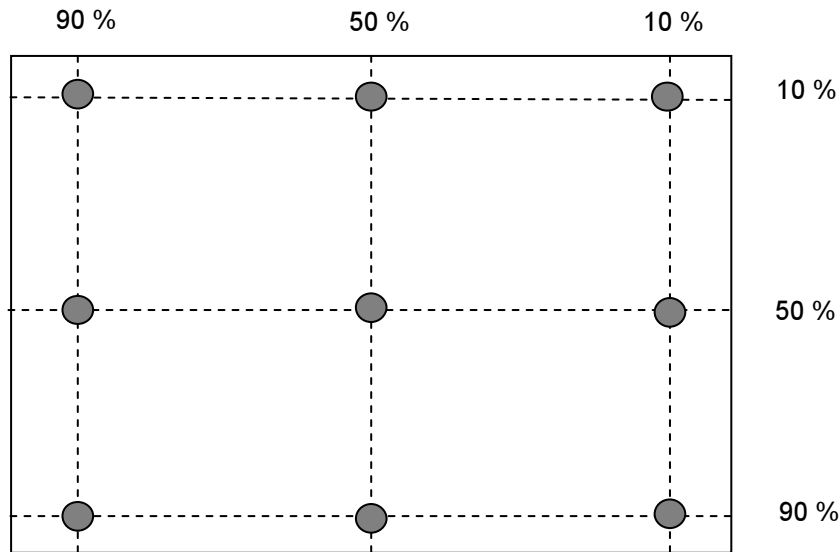

Note 3: The luminance uniformity of 9 points is defined by dividing the minimum luminance values by the maximum test point luminance

$$\delta_{w9} = \frac{\text{Minimum Brightness of nine points}}{\text{Maximum Brightness of nine points}}$$

Note 4 : Definition of contrast ratio (CR):

$$\text{Contrast ratio (CR)} = \frac{\text{Brightness on the "White" state}}{\text{Brightness on the "Black" state}}$$


Note 5 : Definition of cross talk (CT)

$$CT = |YB - YA| / YA \times 100 (\%)$$

Where


YA = Luminance of measured location without gray level 0 pattern (cd/m<sup>2</sup>)

YB = Luminance of measured location with gray level 0 pattern (cd/m<sup>2</sup>)

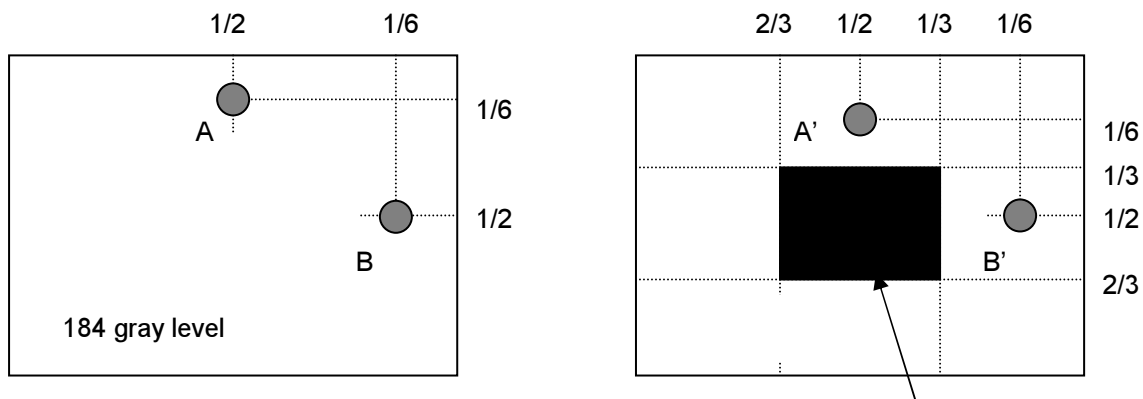


#### Note 6: Definition of response time:

The output signals of photo detector are measured when the input signals are changed from “White” to “Black” (falling time) and from “Black” to “White” (rising time), respectively. The response time interval is between 10% and 90% of amplitudes. Please refer to the figure as below.

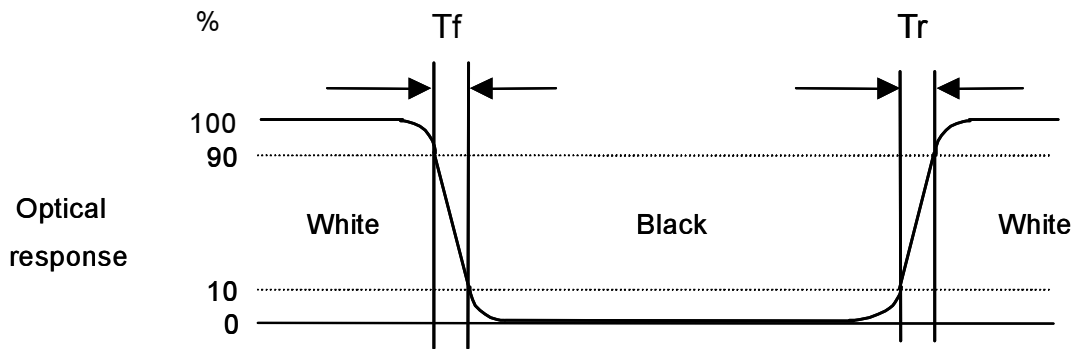


#### Note 7: Definition of viewing angle

Viewing angle is the measurement of contrast ratio  $\geq 10$ , at the screen center, over a  $180^\circ$  horizontal and  $180^\circ$  vertical range (off-normal viewing angles). The  $180^\circ$  viewing angle range is broken down as below:  $90^\circ$  ( $\theta$ ) horizontal left and right, and  $90^\circ$  ( $\phi$ ) vertical high (up) and low (down). The measurement direction is typically perpendicular to the display surface with the screen rotated to its center to develop the desired measurement viewing angle.

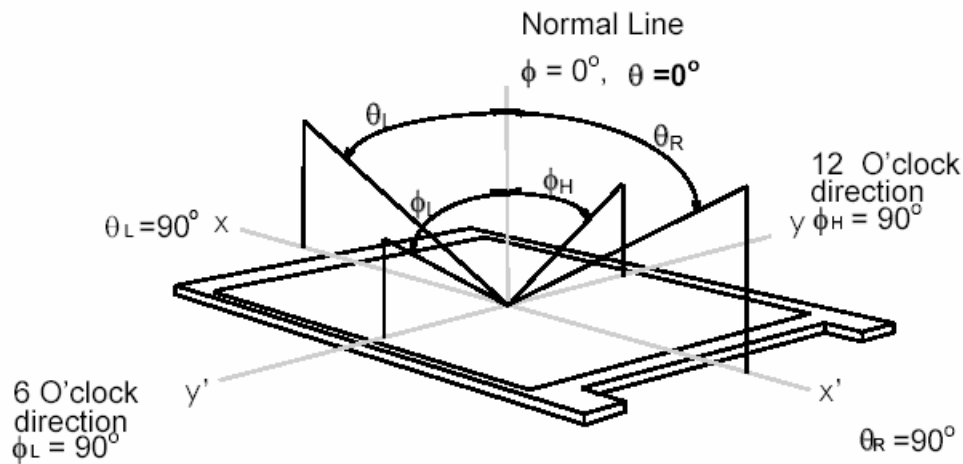

### 3. Functional Block Diagram

The following diagram shows the functional block of the 15 inch color TFT/LCD module:

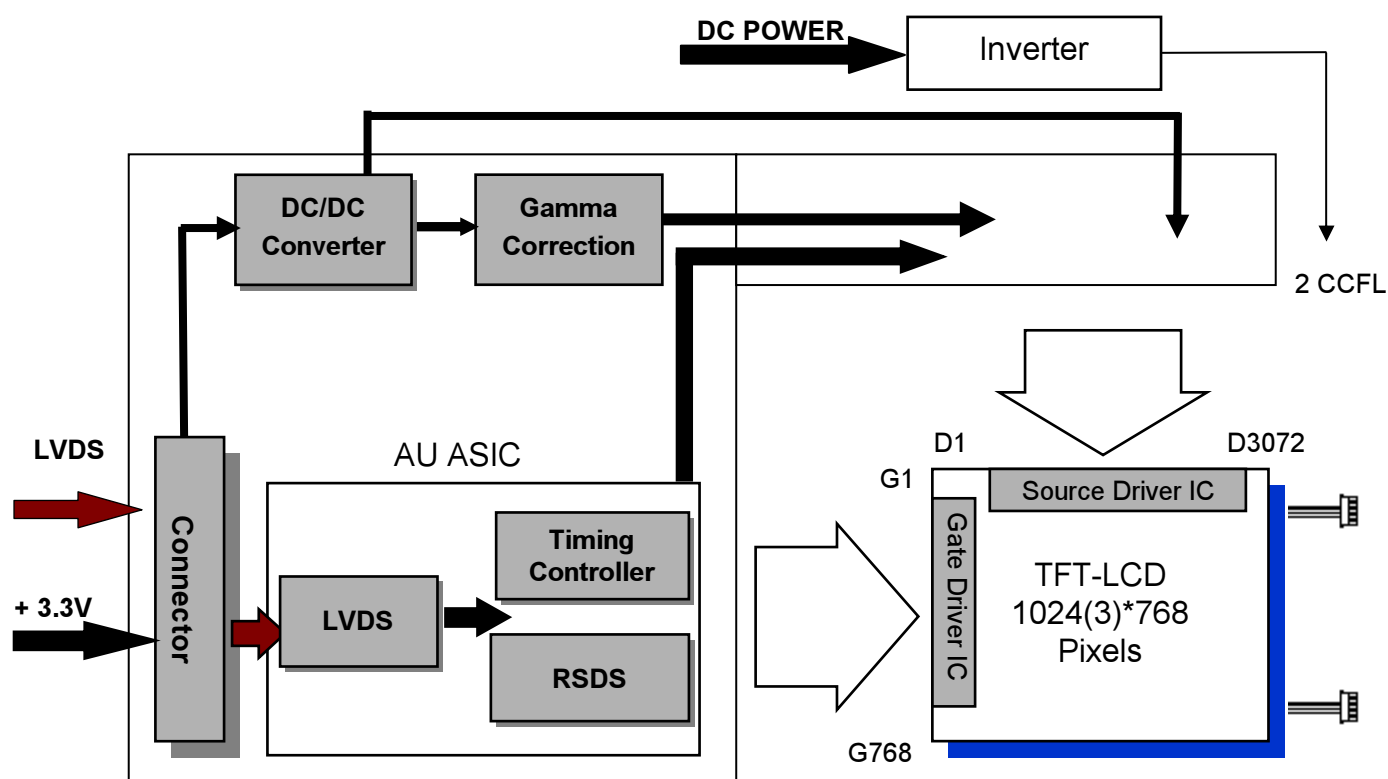

3804-F20N-06R / MSB240420E

JST-BDBR-03(4.0)V-S

Mating Type: HRS DF14-20S-1.25C

SM03B-BHS-1R

## 4. Absolute Maximum Ratings

### 4.1 Absolute Ratings of TFT LCD Module


| Item                    | Symbol | Min  | Max  | Unit   |
|-------------------------|--------|------|------|--------|
| Logic/LCD Drive Voltage | Vin    | -0.3 | +3.6 | [Volt] |

### 4.2 Absolute Ratings of Environment

| Item                  | Symbol | Min | Max  | Unit  |
|-----------------------|--------|-----|------|-------|
| Operating Temperature | TOP    | 0   | +65* | [°C]  |
| Operation Humidity    | HOP    | 8   | 90   | [%RH] |
| Storage Temperature   | TST    | -20 | +65  | [°C]  |
| Storage Humidity      | HST    | 8   | 90   | [%RH] |

Note: Maximum Wet-Bulb should be 39°C and no condensation.

\* 65 °C is panel surface temperature

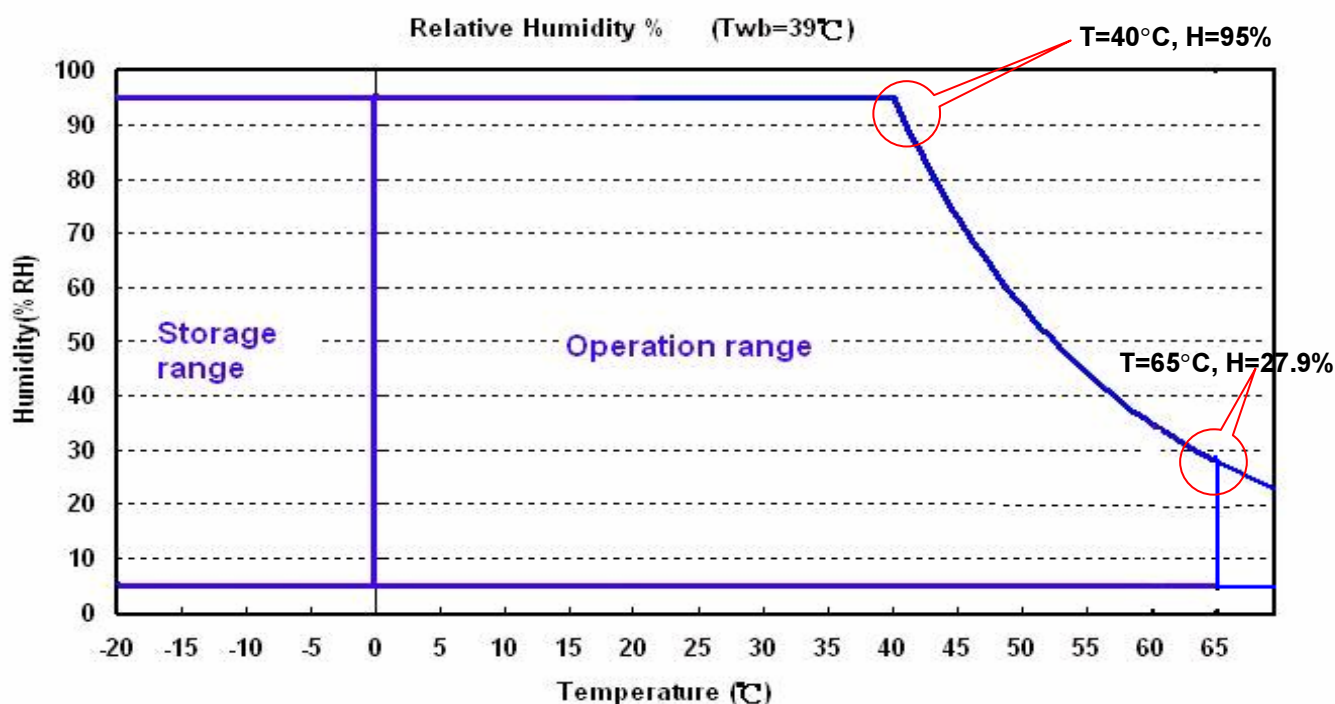



## 5. Electrical Characteristics

### 5.1 TFT LCD Module

#### 5.1.1 Power Specification

| Symbol | Parameter               | Min | Typ | Max | Units  | Remark                                     |
|--------|-------------------------|-----|-----|-----|--------|--------------------------------------------|
| VDD    | Logic/LCD Drive Voltage | 3.0 | 3.3 | 3.6 | [Volt] | $\pm 10\%$                                 |
| IDD    | VDD Current             | -   | 1   | 1.5 | [A]    | 64 Gray Bar Pattern<br>(VDD=3.3V, at 60Hz) |
| Irush  | LCD Inrush Current      | -   | -   | 3   | [A]    | Note 1                                     |
| PDD    | VDD Power               | -   | 3.3 | 5   | [Watt] | 64 Gray Bar Pattern<br>(VDD=3.3V, at 60Hz) |

Note 1: Measurement condition:

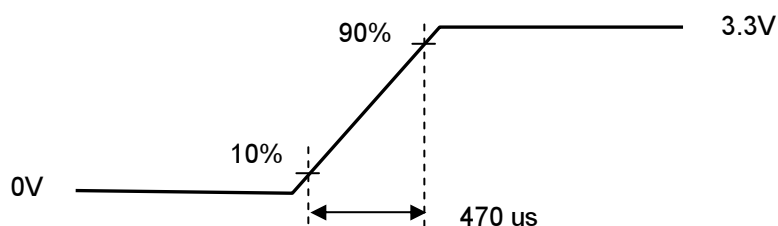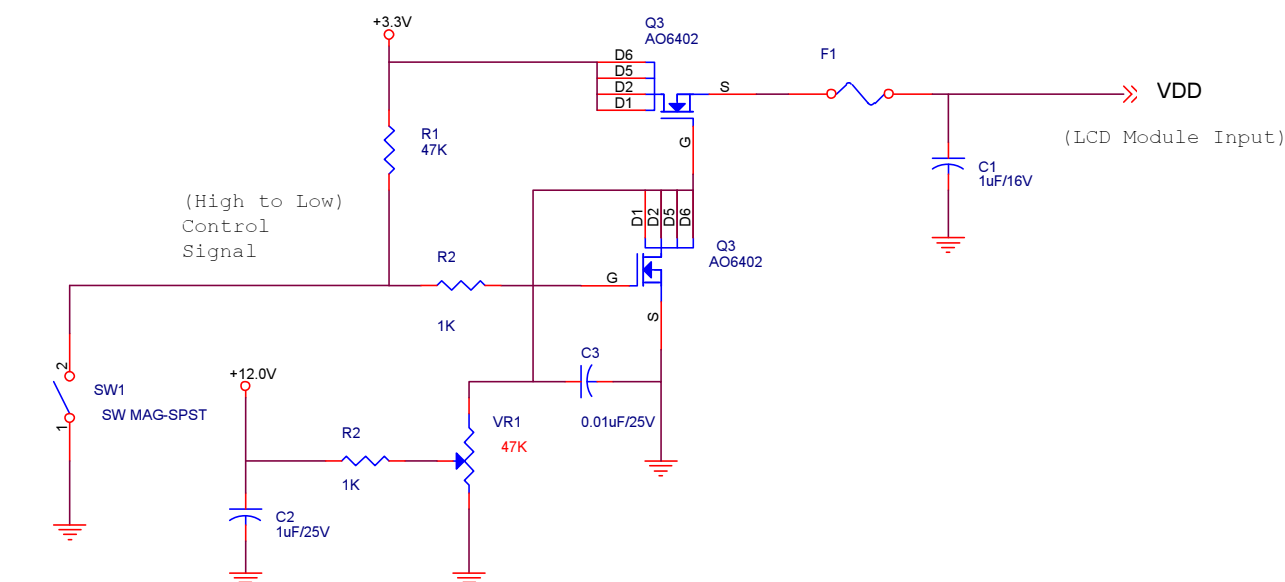

VDD rising time




64 Gray pattern

### 5.1.2 Signal Electrical Characteristics

Input signals shall be low or Hi-Z state when VDD is off.

| Symbol | Item                                   | Min. | Typ. | Max. | Unit | Remark         |
|--------|----------------------------------------|------|------|------|------|----------------|
| VTH    | Differential Input High Threshold      | -    | -    | 100  | [mV] | VCM=1.2V       |
| VTL    | Differential Input Low Threshold       | -100 | -    | -    | [mV] | VCM=1.2V       |
| VID    | Input Differential Voltage             | 100  | 400  | 600  | [mV] |                |
| VICM   | Differential Input Common Mode Voltage | 1.1  |      | 1.45 | [V]  | VTH/VTL=±100mV |

Note: LVDS Signal Waveform.

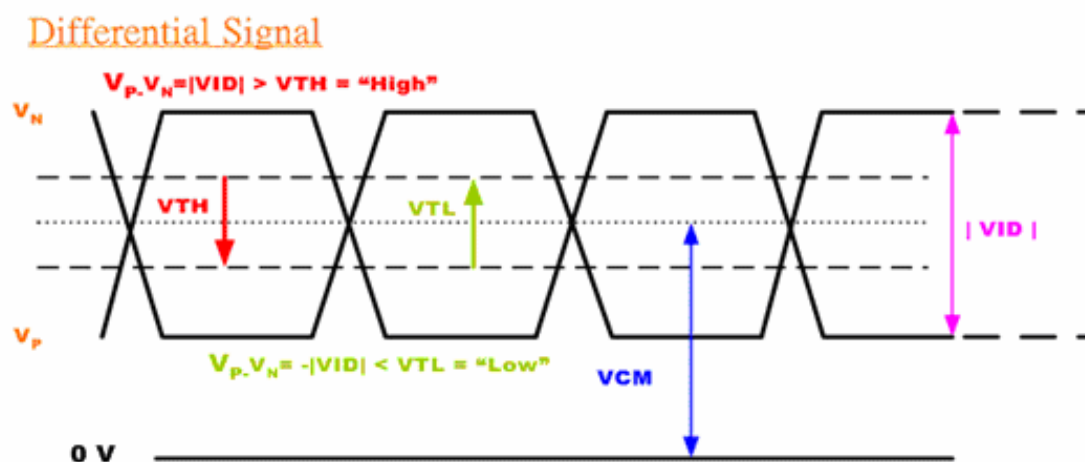


## 5.2 Backlight Unit

### 5.2.1 Parameter guideline for CCFL

Following characteristics are measured under a stable condition using an inverter at 25°C (Room Temperature):


| Symbol                         | Parameter                                     | Min.   | Typ. | Max.  | Unit          | Remark                                          |
|--------------------------------|-----------------------------------------------|--------|------|-------|---------------|-------------------------------------------------|
| IRCFL                          | CCFL operation range                          | 3.5    | 8    | 8.5   | [mA]<br>rms   | (Ta=25°C) Note 1                                |
| FCFL                           | CCFL Frequency                                | 40     | 55   | 60    | [KHz]         | (Ta=25°C) Note 2                                |
| ViCFL<br>(0°C)<br>(reference)  | CCFL Ignition Voltage                         | -      | 1080 | 1290  | [Volt]<br>rms | (Ta= 0°C)                                       |
| ViCFL<br>(25°C)<br>(reference) | CCFL Ignition Voltage                         | -      | 860  | 1030  | [Volt]<br>rms | (Ta=25°C)                                       |
| VCFL                           | CCFL Discharge Voltage                        | 540    | 600  | 660   | [Volt]<br>rms | (Ta=25°C) Note 3<br>IRCFL=8mA<br>VCFL = Typ±10% |
| PCFL                           | CCFL Power consumption<br>(inverter excluded) | -      | 9.52 | 10.47 | [Watt]        | (Ta=25°C) Note 3<br>IRCFL=8mA                   |
| Lamp Life                      |                                               | 30,000 | -    |       | Hrs           | (Ta=25°C) Note 4<br>IRCFL = 8mA                 |

Note 1: IRCFL is defined as the return current of an inverter. (In Figure. 1)

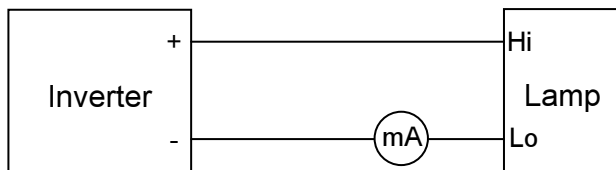

(Figure. 1: Measurement of return current)

A stable IRCFL is a current without flicker or biasing waveform provided by inverter that ensures the backlight perform to its specification. The ideal sine waveform should be symmetric in positive and negative polarities and the asymmetry rate of the inverter waveform should be below 10%.

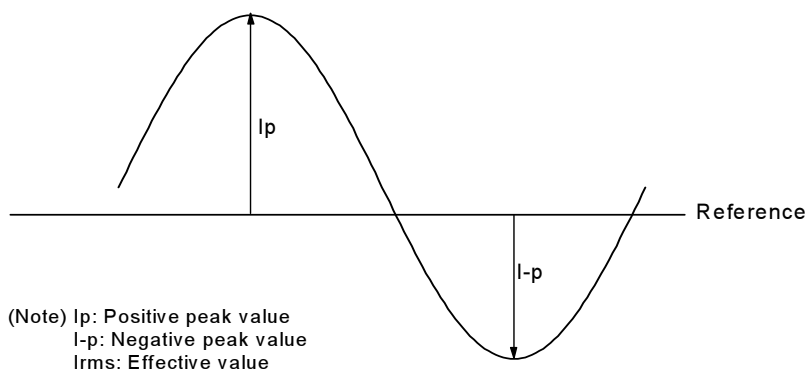

$$\text{DC Bias} = (|I_p - I_{-p}| / I_{\text{rms}}) \times 100 \% < 10\%$$

$$\text{Crest Factor} = I_p \text{ or } (I_{-p}) / I_{\text{rms}} \text{ should have the range within } 1.414 \pm 10\%$$

It is recommended to use the inverter with detection circuit ( ie: balance and protection circuit) to avoid overvoltage, overcurrent, or mismatching waveform.

Note 2: CCFL frequency should be carefully determined to avoid interference between inverter and TFT LCD. Higher frequency will induce higher leakage current and further impact lamp life.

Note 3: Calculator value for reference ( $IRCFL \times VCFL \times 2 = PCFL$ ).

Note 4: The definition of lamp life means when any of following conditions happen:

- a) Luminance falls to 50% or less of the initial value.
- b) Normal lighting is no more available (flickering, pink lighting, no lighting, etc.)
- c) Lamp voltage or lighting start voltage exceeds the specified value.

Lamp life time shortens according to


- a) Placing methodology: mercury is unevenly distributed in portrait mounting
- b) Environmental condition: low temperature reduces the presence of mercury vapor, which results in approximately lamp life of 1,000 hours
- c) CCFL surface temperature: Presence of gradient in lamp surface temperature causes uneven mercury migration
- d) Inverter design: its resonance capacitor should be fine-tuned according to the impedance of CCFL
- e) Over driving current ( > 8.5 mA) shortens lamp life time dramatically.

Note 5: The display is with dual lamp design, and the CCFL current in above table refers to each lamp

## 6. Signal Characteristic

### 6.1 Pixel Format Image

Following figure shows the relationship between input signal and LCD pixel format.

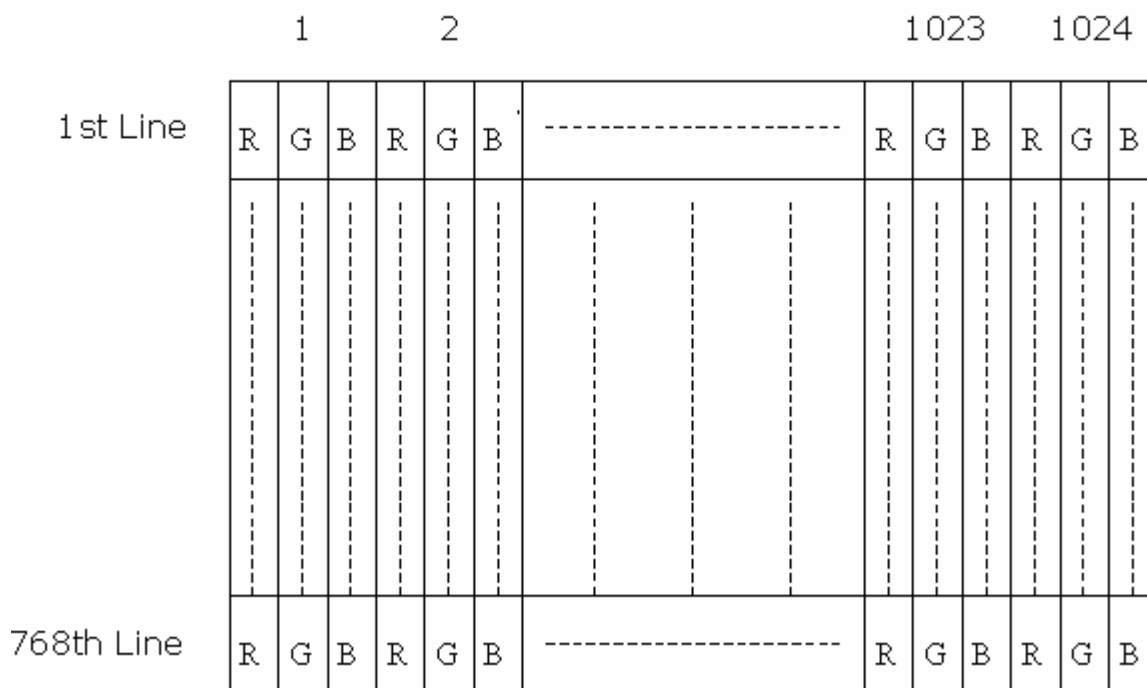

### 6.3 Signal Description

The module using a pair of LVDS receiver SN75LVDS82(Texas Instruments) or compatible. LVDS is a differential signal technology for LCD interface and high speed data transfer device. Transmitter shall be SN75LVDS83(negative edge sampling) or compatible. The first LVDS port(RxOxxx) transmits odd pixels while the second LVDS port(RxExxx) transmits even pixels.

| 3804-F20N-06R (E&T) / MSB240420E(STM) |        |                                                                    |
|---------------------------------------|--------|--------------------------------------------------------------------|
| Pin No.                               | Symbol | Description                                                        |
| 1                                     | VDD    | Power Supply, 3.3V (typical)                                       |
| 2                                     | VDD    | Power Supply, 3.3V (typical)                                       |
| 3                                     | VSS    | Ground                                                             |
| 4                                     | GND    | Ground                                                             |
| 5                                     | Rin1-  | - LVDS differential data input (R0-R5, G0)                         |
| 6                                     | Rin1+  | + LVDS differential data input (R0-R5, G0)                         |
| 7                                     | VSS    | Ground                                                             |
| 8                                     | Rin2-  | - LVDS differential data input (G1-G5, B0-B1)                      |
| 9                                     | Rin2+  | + LVDS differential data input (G1-G5, B0-B1)                      |
| 10                                    | VSS    | Ground                                                             |
| 11                                    | Rin3-  | - LVDS differential data input (B2-B5, HS, VS, DE)                 |
| 12                                    | Rin3+  | + LVDS differential data input (B2-B5, HS, VS, DE)                 |
| 13                                    | VSS    | Ground                                                             |
| 14                                    | ClkIN- | - LVDS differential clock input                                    |
| 15                                    | ClkIN+ | + LVDS differential clock input                                    |
| 16                                    | GND    | Ground                                                             |
| 17                                    | Rin4-  | - LVDS differential data input (R6-R7, G6-G7,B6-B7) * <b>Note2</b> |
| 18                                    | Rin4+  | - LVDS differential data input (R6-R7, G6-G7,B6-B7) * <b>Note2</b> |
| 19                                    | VSS    | Ground                                                             |
| 20                                    | SEL68  | Selection for 6 bits/8bits LVDS data input * <b>Note1</b>          |


Note 1: Input signals shall be in low status when VDD is off.

Note 2: For 6 bits mode, please keep the Pin 17& Pin 18 NC or make sure that the voltage of Pin 18 is always higher than the voltage of Pin 17.


## 6.4 The Input Data Format

### 6.4.1 SEL68

**SEL68 = "High" or "NC" for 6 bits LVDS Input**

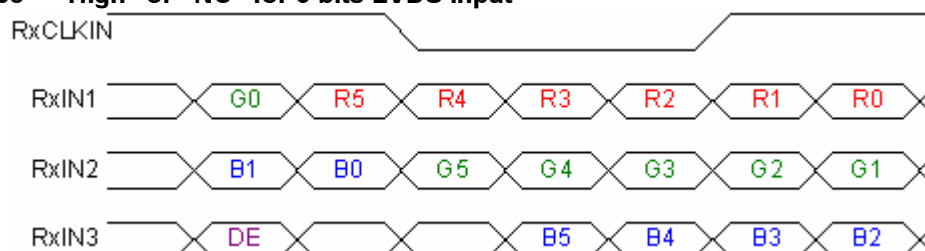

**SEL68 = "Low" for 8 bits LVDS Input**

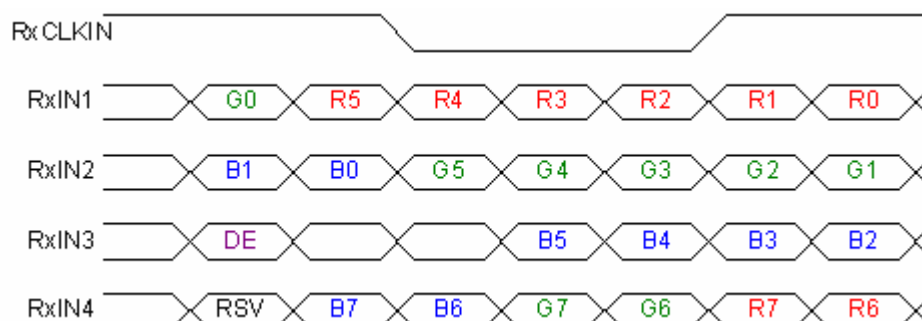

**Note1:** Please follow PSWG.

**Note2:** R/G/B data 7:MSB, R/G/B data 0:LSB

| Signal Name                                  | Description                                                                                                                  | Remark                                                                                                             |
|----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| R7<br>R6<br>R5<br>R4<br>R3<br>R2<br>R1<br>R0 | Red Data 7<br>Red Data 6<br>Red Data 5<br>Red Data 4<br>Red Data 3<br>Red Data 2<br>Red Data 1<br>Red Data 0                 | Red-pixel Data<br><br>For 8Bits LVDS input<br>MSB: R7 ; LSB: R0<br><br>For 6Bits LVDS input<br>MSB: R5 ; LSB: R0   |
| G7<br>G6<br>G5<br>G4<br>G3<br>G2<br>G1<br>G0 | Green Data 7<br>Green Data 6<br>Green Data 5<br>Green Data 4<br>Green Data 3<br>Green Data 2<br>Green Data 1<br>Green Data 0 | Green-pixel Data<br><br>For 8Bits LVDS input<br>MSB: G7 ; LSB: G0<br><br>For 6Bits LVDS input<br>MSB: G5 ; LSB: G0 |
| B7<br>B6<br>B5<br>B4<br>B3<br>B2<br>B1<br>B0 | Blue Data 7<br>Blue Data 6<br>Blue Data 5<br>Blue Data 4<br>Blue Data 3<br>Blue Data 2<br>Blue Data 1<br>Blue Data 0         | Blue-pixel Data<br><br>For 8Bits LVDS input<br>MSB: B7 ; LSB: B0<br><br>For 6Bits LVDS input<br>MSB: B5 ; LSB: B0  |
| RxCLKIN                                      | LVDS Data Clock                                                                                                              |                                                                                                                    |
| DE                                           | Data Enable Signal                                                                                                           | When the signal is high, the pixel data shall be valid to be displayed.                                            |

Note: Output signals from any system shall be low or Hi-Z state when VDD is off.

## 6.5 Interface Timing


### 6.5.1 Timing Characteristics

| Signal       | Parameter          |          | Symbol               | Min. | Typ. | Max. | Unit               |
|--------------|--------------------|----------|----------------------|------|------|------|--------------------|
| Clock Timing | Clock frequency    |          | $1/T_{\text{Clock}}$ | 50   | 65   | 81   | MHz                |
| Vsync Timing | Vertical Section   | Period   | $T_V$                | 783  | 806  | 968  | $T_{\text{Line}}$  |
|              |                    | Active   | $T_{VD}$             | 768  | 768  | 768  |                    |
|              |                    | Blanking | $T_{VB}$             | 15   | 38   | 200  |                    |
| Hsync Timing | Horizontal Section | Period   | $T_H$                | 1224 | 1344 | 2024 | $T_{\text{Clock}}$ |
|              |                    | Active   | $T_{HD}$             | 1024 | 1024 | 1024 |                    |
|              |                    | Blanking | $T_{HB}$             | 200  | 320  | 1000 |                    |

Note: Support DE mode only.


Note : Typical value refer to VESA STANDARD

### 6.5.2 Input Timing Diagram

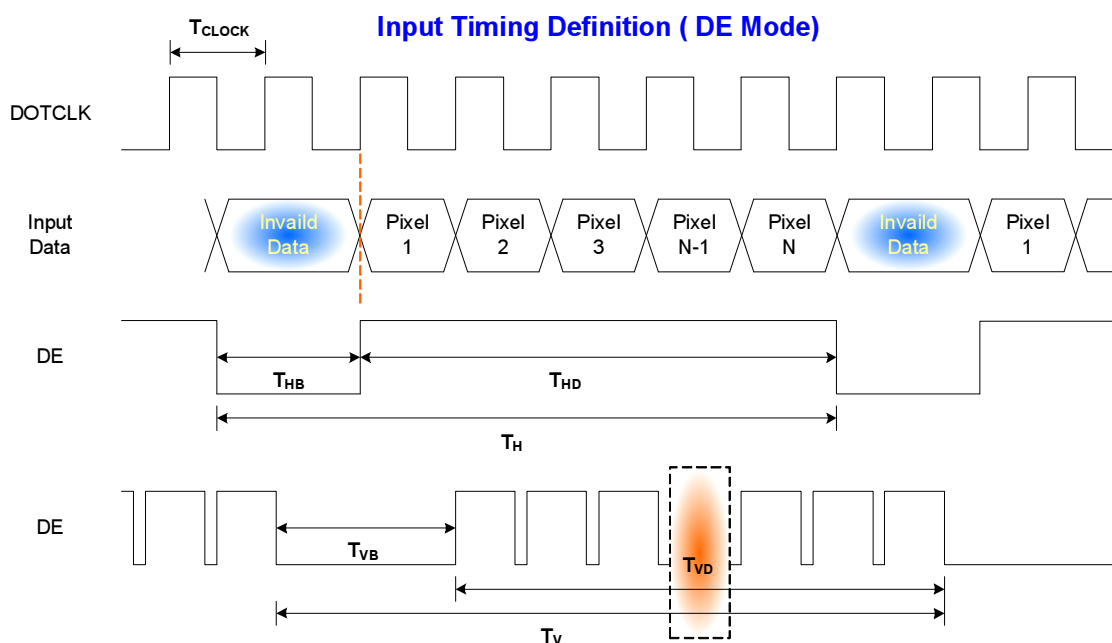

## 6.6 Power ON/OFF Sequence

VDD power and lamp on/off sequence is as below. Interface signals are also shown in the chart. Signals from any system shall be Hi-Z state or low level when VDD is off.

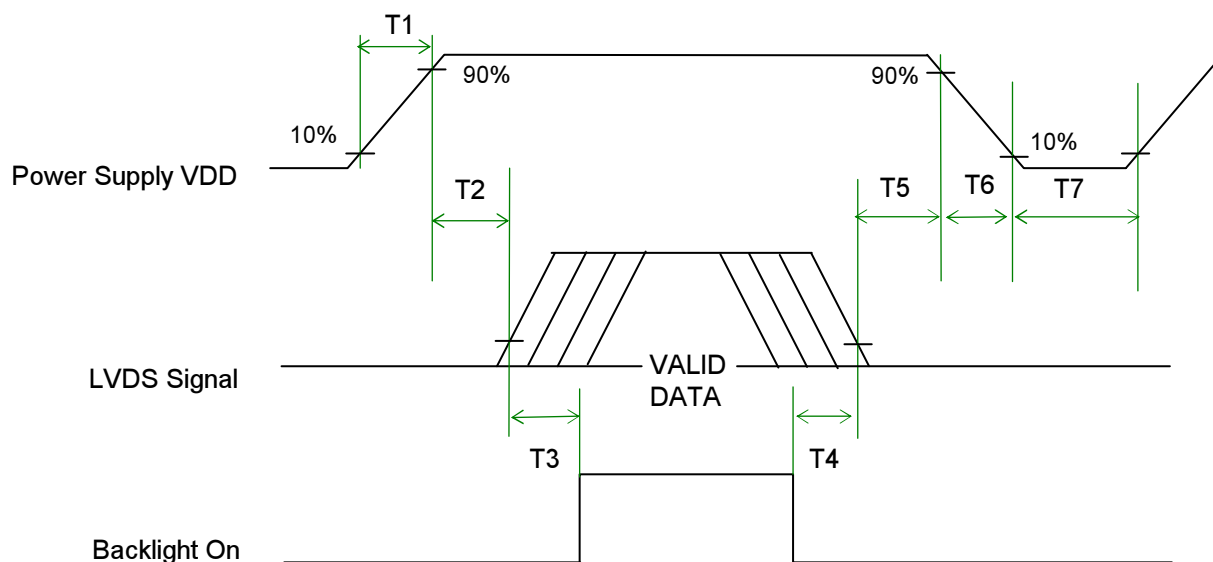

### Power ON/OFF sequence timing

| Parameter | Value |      |      | Units |
|-----------|-------|------|------|-------|
|           | Min.  | Typ. | Max. |       |
| T1        | 0.5   | -    | 10   | ms    |
| T2        | 0     | 40   | 50   | ms    |
| T3        | 200   | -    | -    | ms    |
| T4        | 200   | -    | -    | ms    |
| T5        | 0     | 16   | 50   | ms    |
| T6        | 0     | -    | 10   | ms    |
| T7        | 1000  | -    | -    | ms    |

The above on/off sequence should be applied to avoid abnormal function in the display. Please make sure to turn off the power when you plug the cable into the input connector or pull the cable out of the connector.


## 7. Connector & Pin Assignment

Physical interface is described as for the connector on module. These connectors are capable of accommodating the following signals and will be following components.

### 7.1 TFT LCD Module: LVDS Connector

| Connector Name / Designation | Signal Connector           |
|------------------------------|----------------------------|
| Manufacturer                 | E&T or compatible          |
| Connector Model Number       | 3804-F20N-06R / MSB240420E |
| Adaptable Plug               | HRS DF14-20S-1.25C         |

| Pin# | Signal Name | Pin# | Signal Name |
|------|-------------|------|-------------|
| 1    | VDD         | 2    | VDD         |
| 3    | VSS         | 4    | GND         |
| 5    | Rin1-       | 6    | Rin1+       |
| 7    | VSS         | 8    | Rin2-       |
| 9    | Rin2+       | 10   | VSS         |
| 11   | Rin3-       | 12   | Rin3+       |
| 13   | VSS         | 14   | ClkIN-      |
| 15   | ClkIN+      | 16   | GND         |
| 17   | Rin4-       | 18   | Rin4+       |
| 19   | VSS         | 20   | SEL68       |

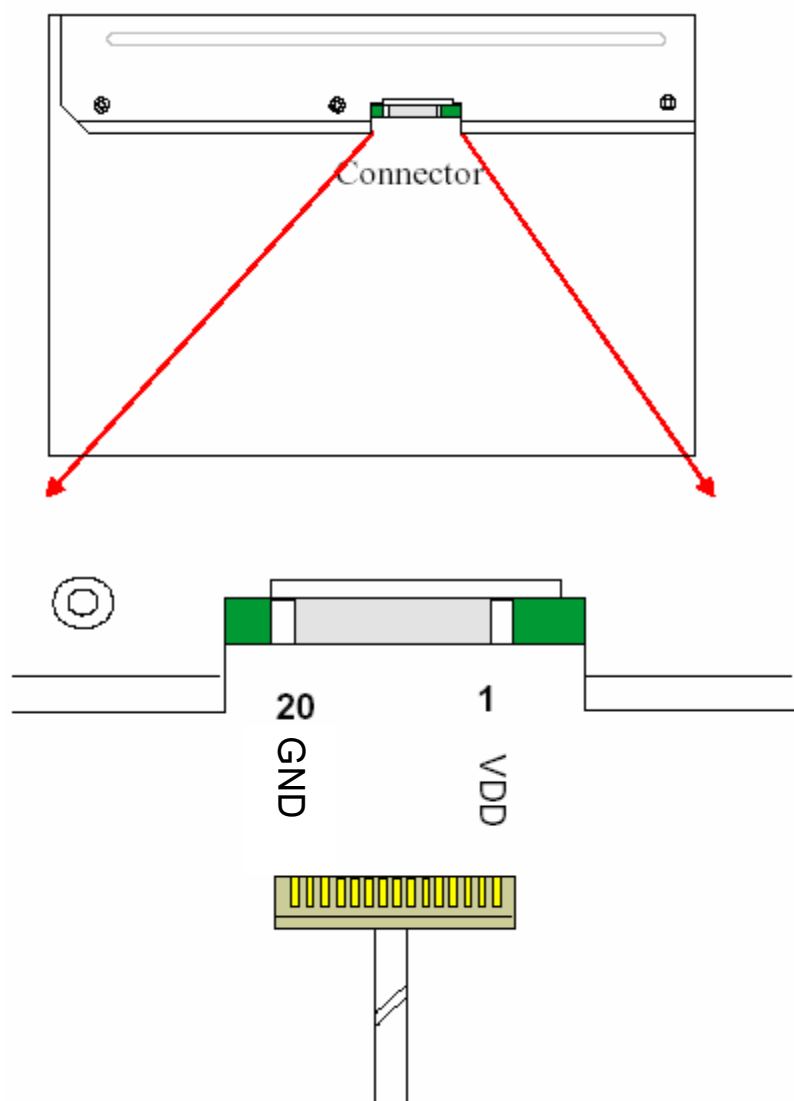

## 7.2 Backlight Unit: Lamp Connector

|                              |                              |
|------------------------------|------------------------------|
| Connector Name / Designation | Lamp Connector               |
| Manufacturer                 | JST or compatible            |
| Connector Model Number       | JST BHR-03VS-1 or compatible |
| Mating Model Number          | SM03B-BHS-1R                 |

## 7.3 Lamp Connector Pin Assignment

| Pin# | Symbol | Cable color | Signal Name       |
|------|--------|-------------|-------------------|
| 1    | HV     | Pink        | Lamp High Voltage |
| 2    | NC     | NC          | No Connection     |
| 3    | LV     | White       | Ground            |

- ◆ Cable length: 120 ± 5 mm
- ◆ Connector-output position: right side (front view)
- ◆ Lamp assembly design shall be easy for replacement and repair

## 8. Reliability Test Criteria

| Items                          | Required Condition                                                                                                                            | Note   |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|--------|
| Temperature Humidity Bias      | 50□/80%,300 hours                                                                                                                             |        |
| High Temperature Operation     | 60□,300 hours                                                                                                                                 |        |
| Low Temperature Operation      | 0□,300 hours                                                                                                                                  |        |
| Hot Storage                    | 65□,300 hours                                                                                                                                 |        |
| Cold Storage                   | -20□,300 hours                                                                                                                                |        |
| Thermal Shock Test             | -20□/30 min ,60□/30 min ,100cycles                                                                                                            |        |
| Shock Test (Non-Operating)     | 50G,20ms,Half-sine wave,( ±X, ±Y, ±Z)                                                                                                         |        |
| Vibration Test (Non-Operating) | 1.5G, (10~200Hz, P-P)<br>30 mins/axis (X, Y, Z)                                                                                               |        |
| On/off test                    | On/10 sec, Off/10 sec, 30,000 cycles                                                                                                          |        |
| ESD                            | Contact Discharge: ± 8KV, 150pF(330Ω ) 1sec, 8 points, 25 times/ point<br>Air Discharge: ± 15KV, 150pF(330Ω ) 1sec, 8 points, 25 times/ point | Note 1 |


Note1: According to EN61000-4-2, ESD class B: Some performance degradation allowed. No data lost  
. Self-recoverable. No hardware failures.



## 9. Mechanical Characteristics


### 9.1 LCM Front View and Rear View

G150XG03 V3



**AUO**


G150XG03 V3

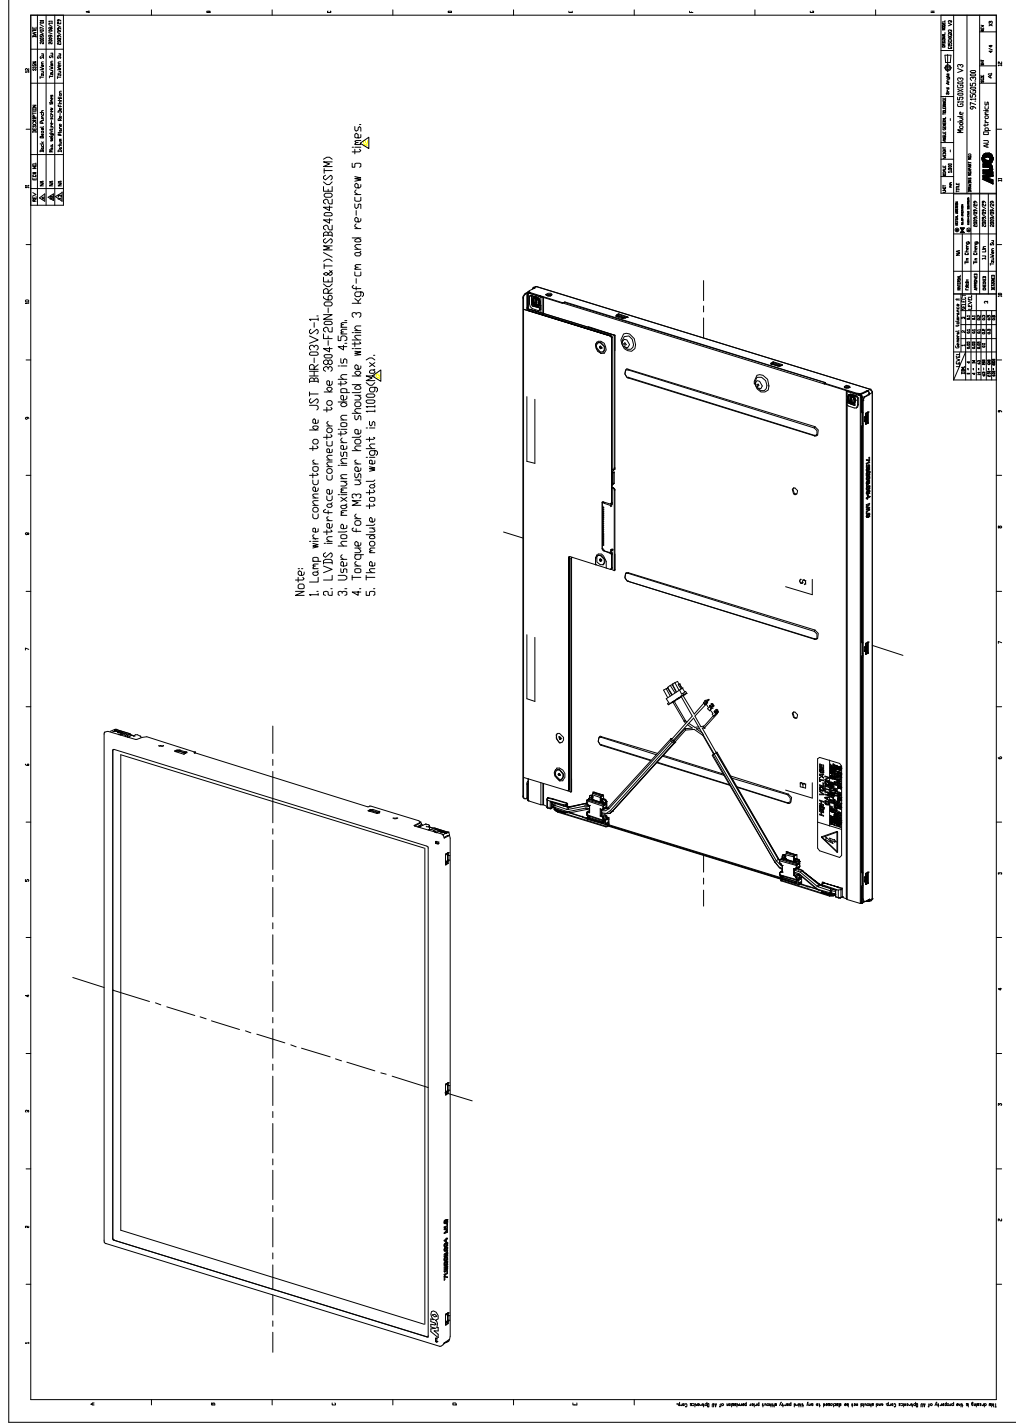



## 9.2 LCM Outline Dimension (Front View)


G150XG03 V3





### 9.3 LCM Outline Dimension (Rear View)

G150XG03 V3

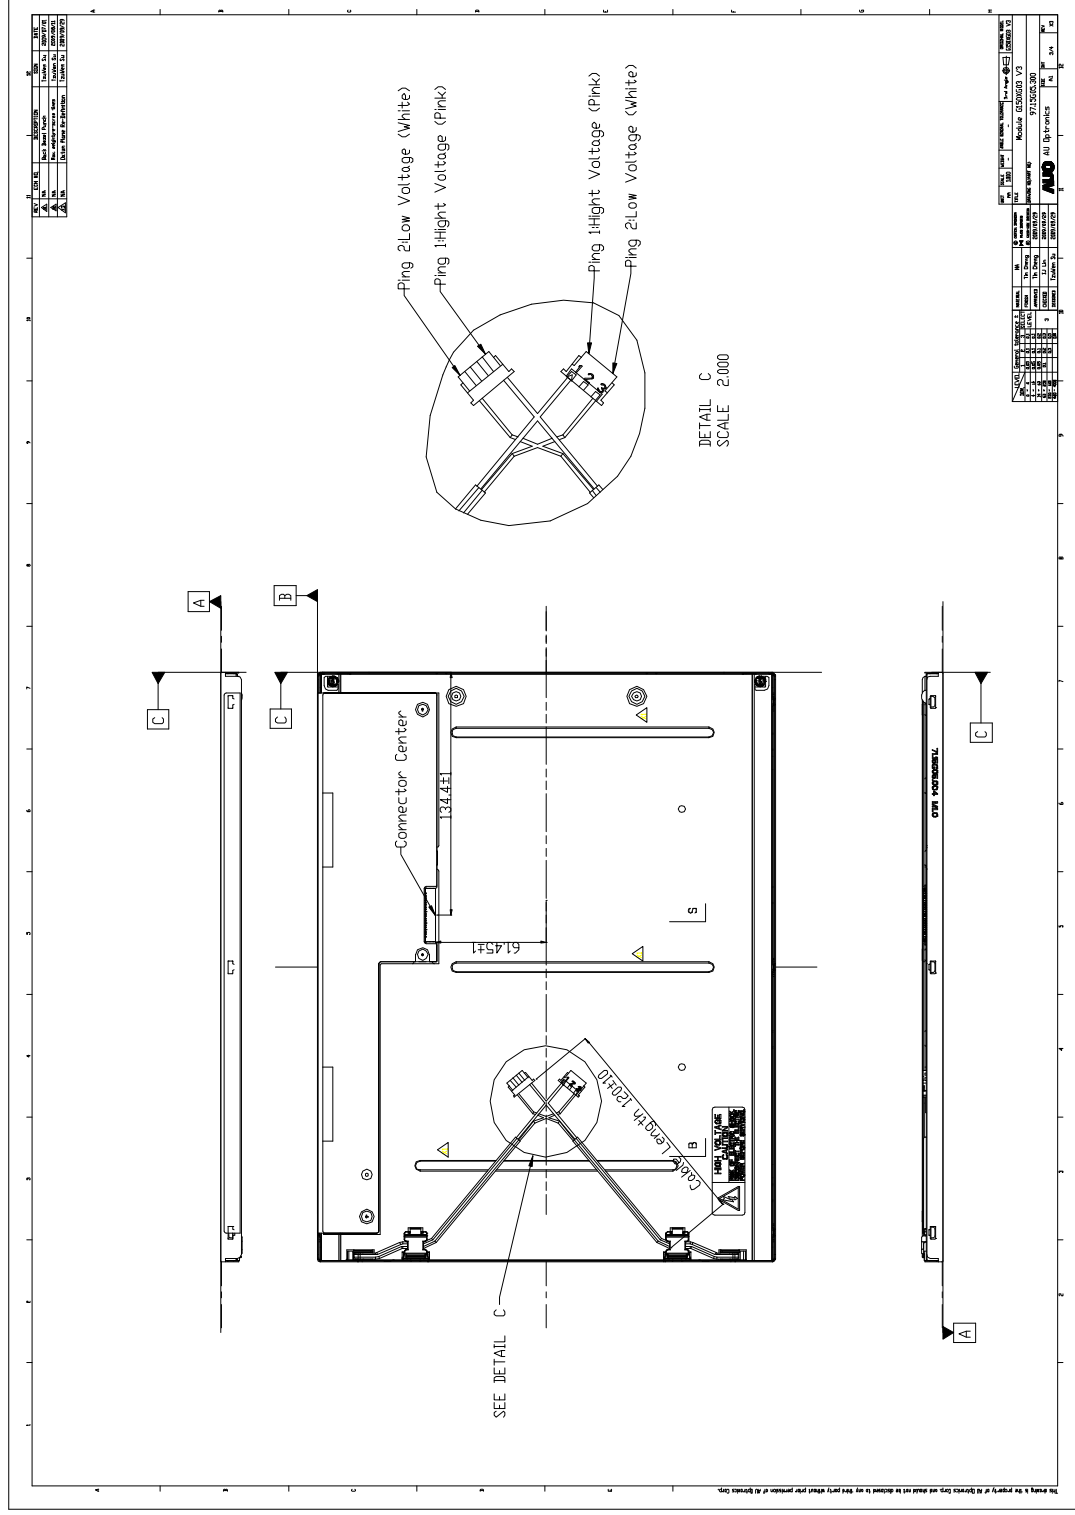

## 10. Label and Packaging

### 10.1 Shipping Label (on the rear side of TFT-LCD display)




### 10.2 Carton Package

Max capacity: 15 TFT-LCD module per carton (15pcs \* 1 layers)

Max weight: 20 kg per carton

Outside dimension of carton: 375(L)mm\* 430(W)mm\* 360(H)mm

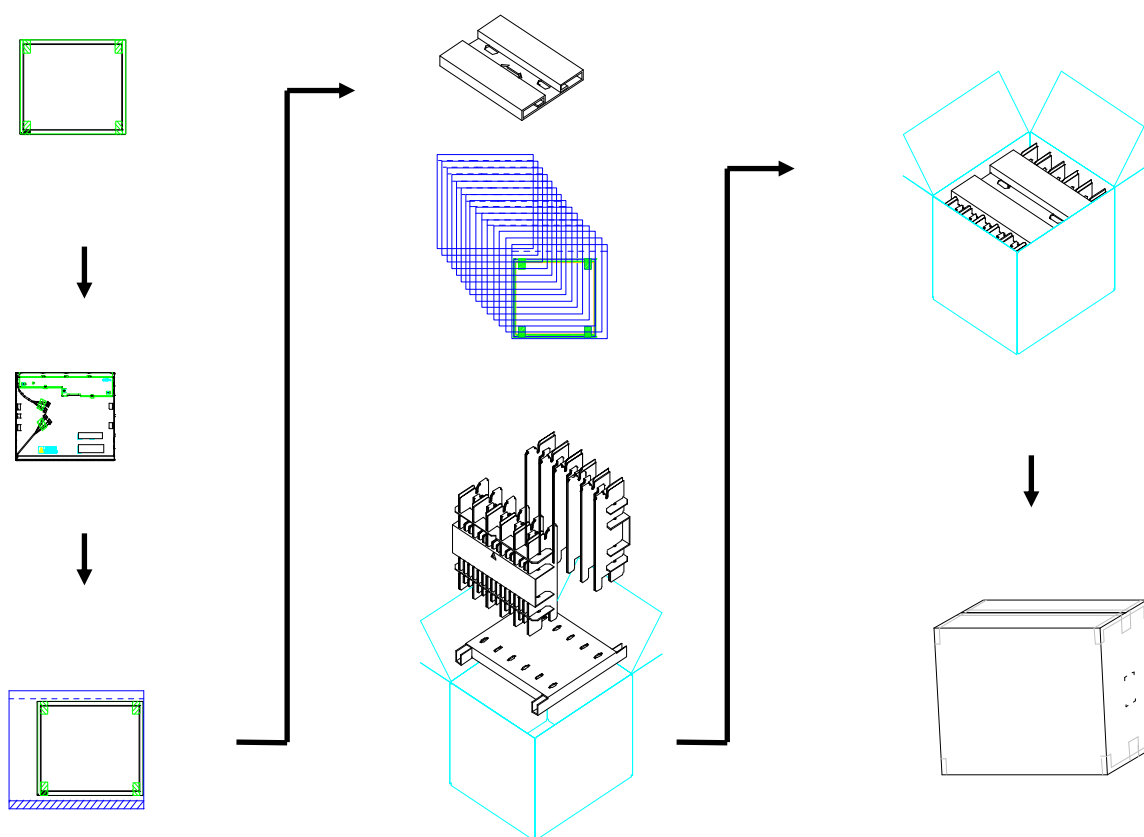

## **11 Safety**

### **11.1 Sharp Edge Requirements**

There will be no sharp edges or comers on the display assembly that could cause injury.

### **11.2 Materials**

#### **11.2.1 Toxicity**

There will be no carcinogenic materials used anywhere in the display module. If toxic materials are used, they will be reviewed and approved by the responsible AUO toxicologist.

#### **11.2.2 Flammability**

All components including electrical components that do not meet the flammability grade UL94-V1 in the module will complete the flammability rating exception approval process.

The printed circuit board will be made from material rated 94-V1 or better. The actual UL flammability rating will be printed on the printed circuit board.

### **11.3 Capacitors**

If any polarized capacitors are used in the display assembly, provisions will be made to keep them from being inserted backwards.

### **11.4 National Test Lab Requirement**

The display module will satisfy all requirements for compliance to:

**UL 1950, First Edition**

**U.S.A. Information Technology Equipment**